

# SPECTROGON

Optical filters • Coatings • Gratings

Date: 2017-09-11

Operator: DG

**Article:**

Art no: 713.

NP-4270-088 nm Ø25.4x1.0 mm

**Specifications:**

CWL: 4270 ±30 nm

HW: 88 ±20 nm


Tmin: 60 %

Blocking: 100 - 30000 nm

**Measurement conditions:**

Temperature: 23 °C

AOI: 0 deg

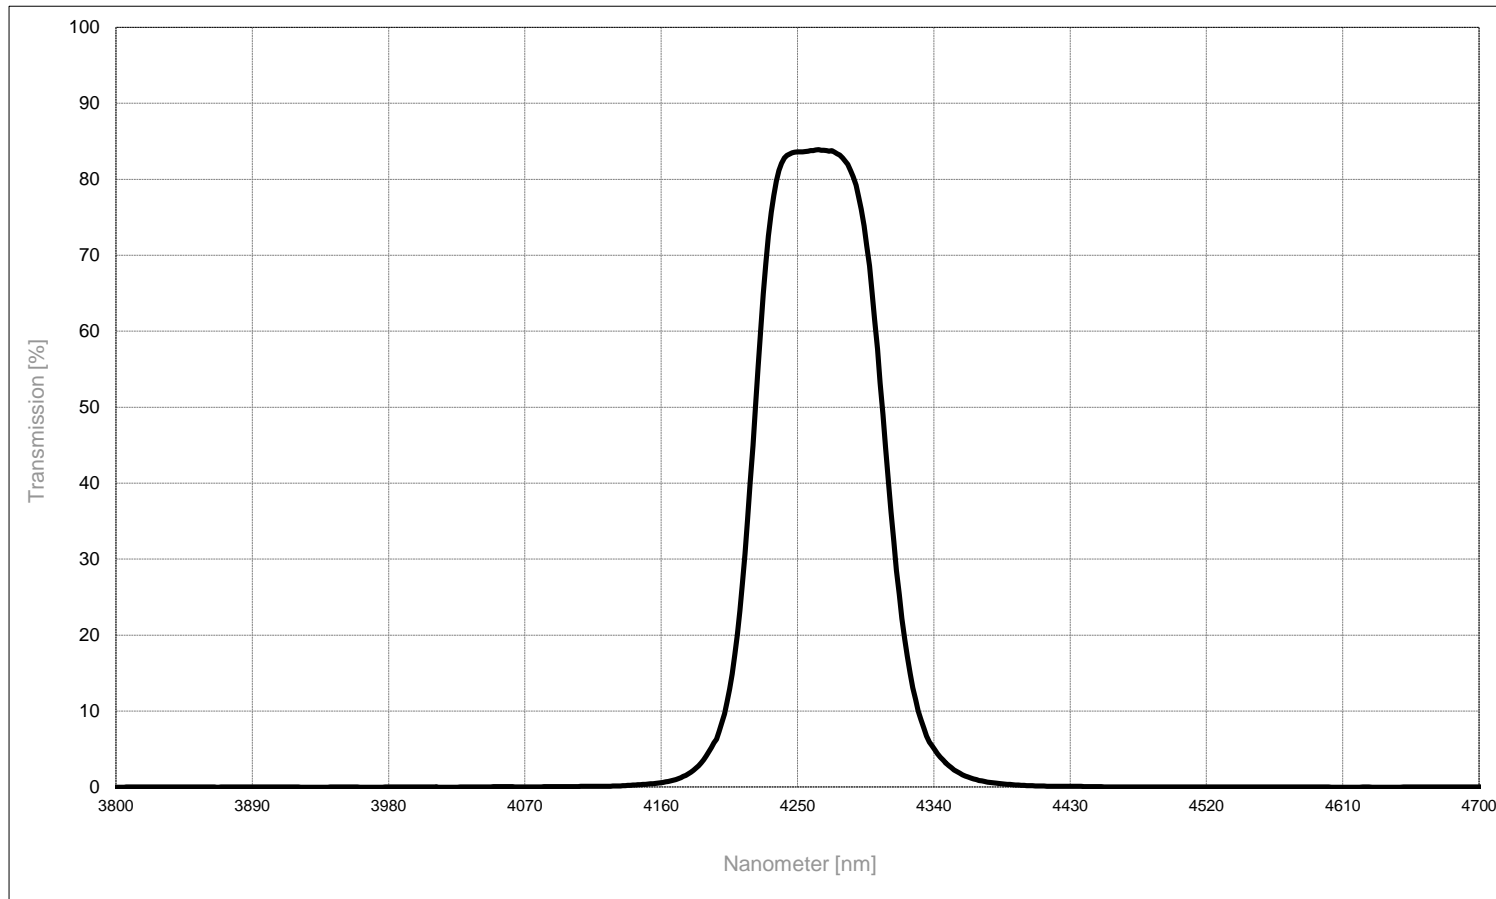

**Calculated values at 45 °C:**

CWL = 4274,62 nm...OK

HW = 89,81 nm...OK

Cuton 5 % = 4202,69 nm

Cutoff 5 % = 4350,71 nm

HP1 = 4219,48 nm

HP2 = 4309,29 nm

Tpeak = 83,92 %...OK

Tavg = 82,58 %

Slope 1 = 0,84 %

Slope 2 = 0,98 %

**Slope 5% abs to half power point:**

Left slope = 0,64 %...OK

Right slope = 0,71 %...OK

**Spectrogon:**

Ref: T26012

Calibration traceable to NIST.

Spectrogon products conform in all aspects with the RoHS Directive.

**Kokyo**

株式会社 光響

Email : [info@symphotony.com](mailto:info@symphotony.com)

Web : <https://www.symphotony.com/>