

# SPECTROGON

Optical filters • Coatings • Gratings

**Article:**

NB-5417-111 nm

**Specifications:**

CWL: +40/-40 nm

HW: +20/-20 nm


Tmin: 60 %

Blocking to: FIR

**Measurement conditions:**

Temperature: 23 °C

AOI: 0 deg

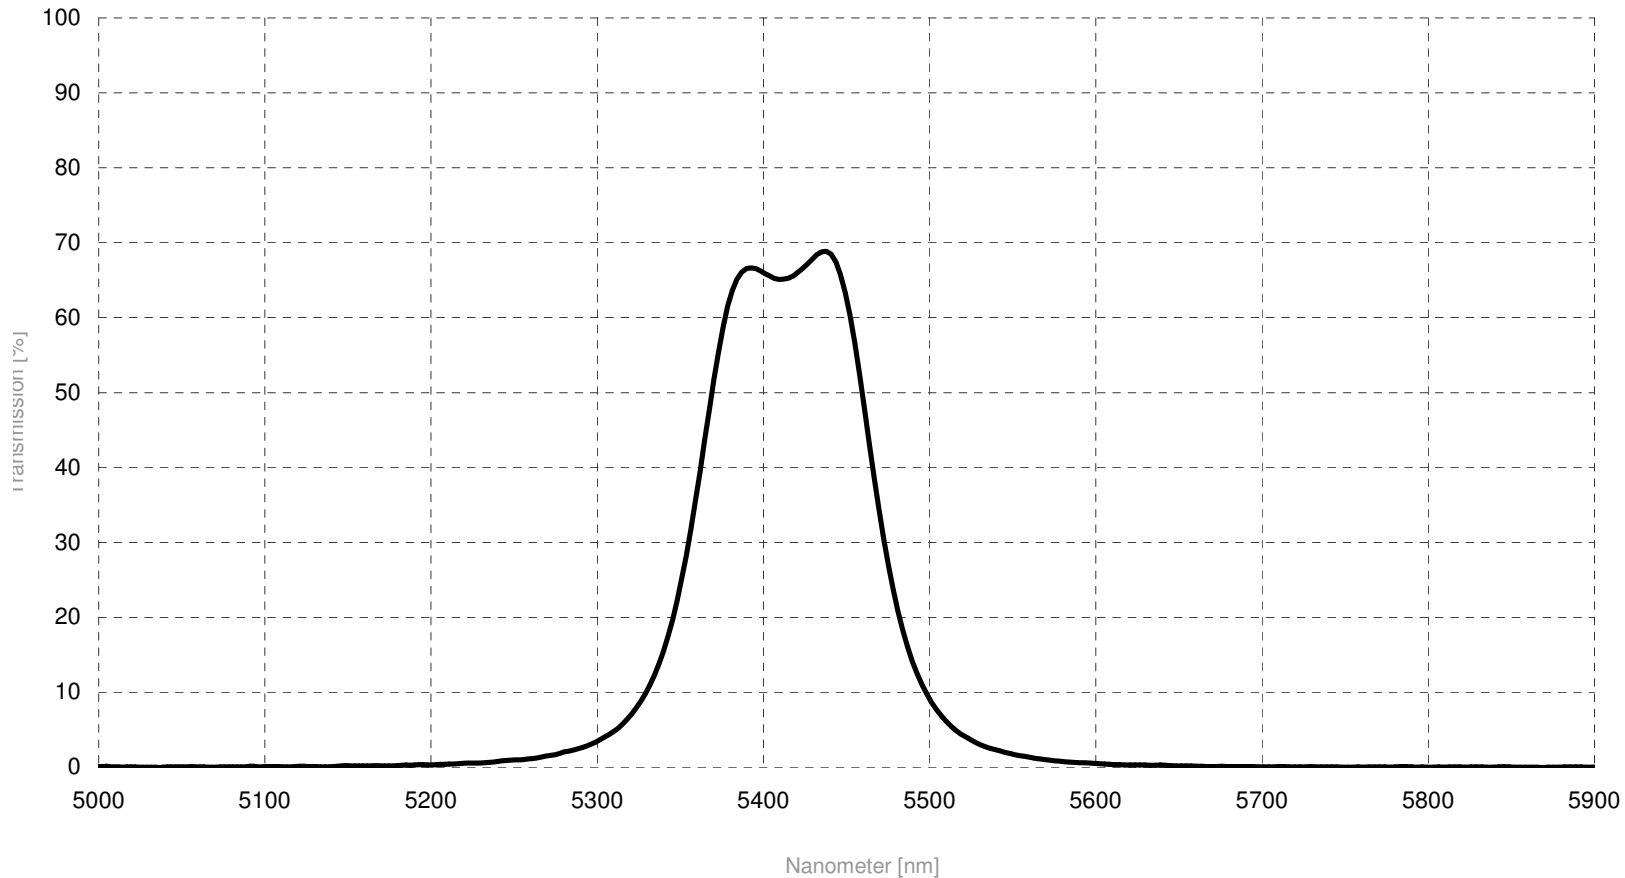

**Actual values:**

CWL = 5413,9 nm

HW = 111,1 nm

Cuton 5% = 5311,4 nm

Cutoff 5% = 5515,4 nm

HP1 = 5358,3 nm

HP2 = 5469,4 nm

Tpeak = 68,9 %

Slope 1 = 1,1 %

Slope 2 = 1,1 %

Data collection range: 1282 - 27005 nm

Diagram range: 5000 - 5900 nm

Ref:

Calibration traceable to NIST.  
Spectrogon products conform in all aspects with the RoHS Directive.

**Kokyo**

株式会社 光響

Email : [info@symphotony.com](mailto:info@symphotony.com)  
Web : <https://www.symphotony.com/>