

[OEFLS-RM-100]

Raman Fiber Laser Sources

Features:

- High power
- Custom wavelength
- Stable output
- Turn-key solution
- Air-cooled package

Applications:

- Medical
- Fiber Sensing
- Raman amplification
- EDFA Pumping
- Optical components testing
- R&D





OEFLS-RM-100


Product description:

This custom-made Raman fiber laser source provides high output power Up to 20W in a wide wavelength range from ~1090 to 2400nm which makes it suitable for many applications including, but not limited to, EDFA pumping, Raman amplification, optical components testing and R&D.


Parameter	Unit	1.2 μm	1.3 μm	1.5 μm	1.7 μm	2.3 μm
Wavelength Range	nm	1090-1250	1250-1400	1400-1510	1580-1750	2100-2400
Output power (LowP/HighP)	W	> 0.5 50	> 0.5 40	> 0.5 5	> 0.5 10	> 0.5 10
3dB bandwidth for LowP/HighP	nm	~0.3 ~3	~0.3 ~3	~0.3 ~3	~0.3 ~3	~1 ~3
ASE suppression	dB	>30	>30	>30	>30	>25
Output fiber type	-	SMF,MMF				
Output	-	FC, ST, SC or free space				
Polarization	-	random				
Operating Temperature	$^{\circ}\text{C}$	0-50				
Dimension	mm	70 x 190 x 310				

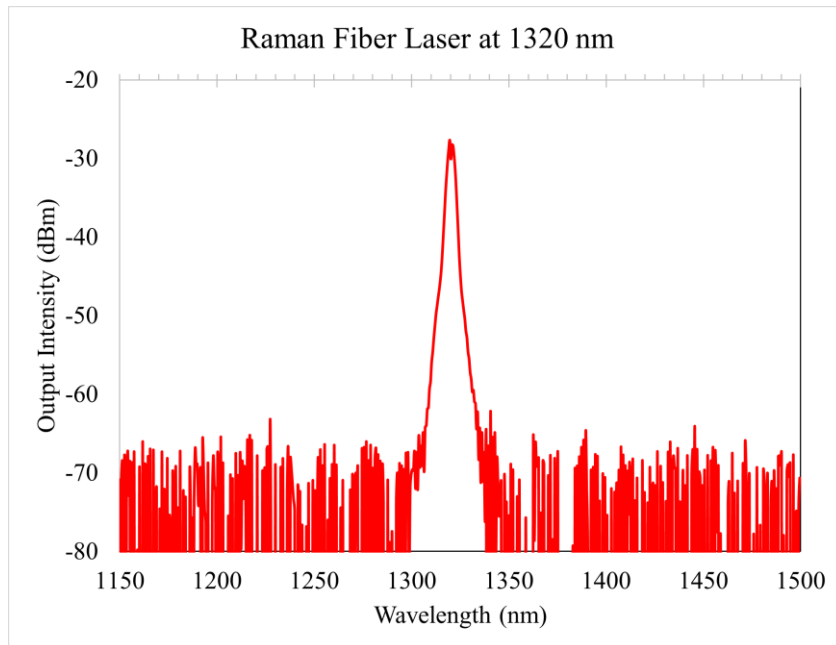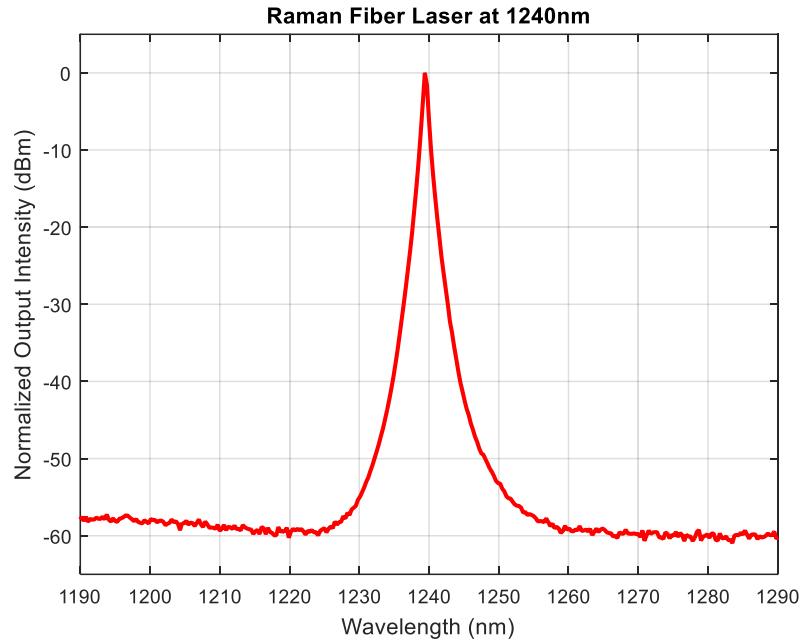

Raman Fiber Laser at 1480nm

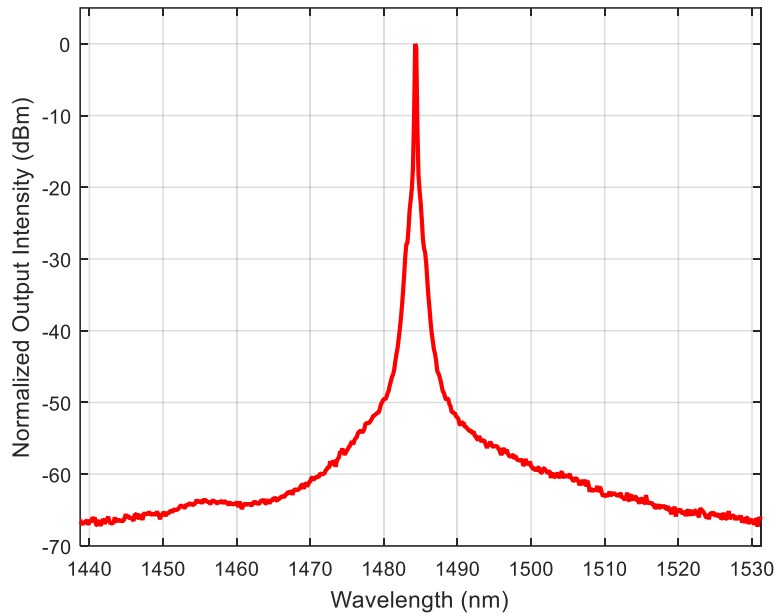

Raman Fiber Laser at 1688 nm

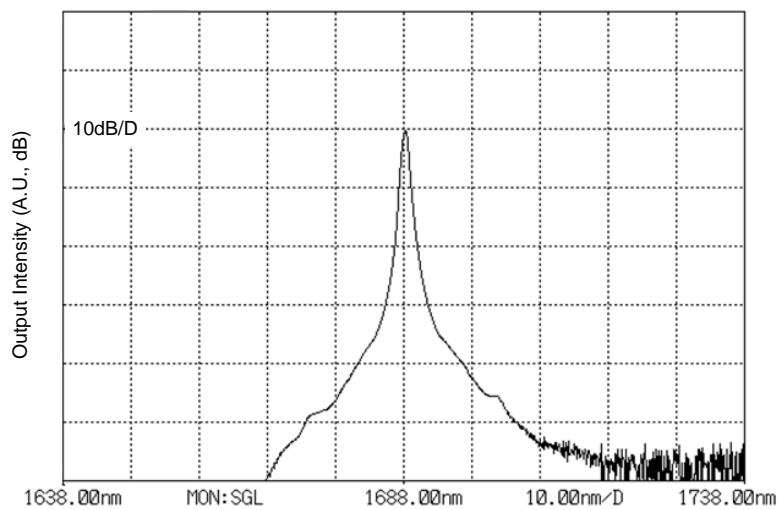

Ordering number:

OEFLS-RM-100-WL-P:	WL	P
	Wavelength (nm)	Average power (W)
Example:	OEFLS-RM-100-1650-5	

Kokyo

株式会社 光響

Email : info@symphotony.com
 Web : <https://www.symphotony.com/>