


Parameters	Unit	Specification	Test Data
Operating Wavelength	nm	1550	
Bandwidth	nm	±40	
Coupling Ratio	%	1/99	
Insertion Loss(Port3→Port1)	dB	≤1.20	0.46
Insertion Loss(Port3→Port2)	dB	≤21.0	20.12
Extinction Ratio(Port3→Port1)	dB	>23	26
Extinction Ratio(Port3→Port2)	dB	>23	24
Return Loss	dB	≥45	52
Connector Type		FC/APC	
Fiber Type		SM15-PS-U25D	
Pigtail Type		3mm loose tube(Yellow)	
Axis Description		Slow axis working,fast axis blocked	
Fiber Length	m	0.70	
Power Handling	mW	≤300	
Operation Temperature	°C	-5 to +70	
Storage Temperature	°C	-40 to +80	
Dimensions	mm	90x20x9.50	

## Package Dimensions:

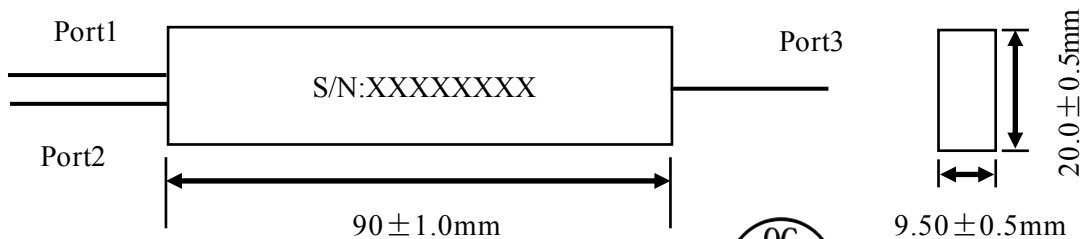

Date: 2024-03-12