

1970nm High Power Bandpass Filter/Isolator Hybrid



FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability

APPLICATIONS


- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks

SPECIFICATIONS

Parameters	Unit	Single Stage	Dual Stage	H Stage
Center Wavelength	nm	1970		
Min. Pass Band Width @ 0.5dB	nm	6.0		
Stop Band @25dB	nm	1900-1960 & 1980-2050		
Insertion Loss@23°C	dB	≤1.6	≤1.9	≤1.9
Signal Isolation (23°C)	dB	≥16	≥30	≥25
Configuration	D Type	-	2-port	
	Y Type	-	3-port, (Blocked Wavelength Guide Out)	
	X Type	-	4-port, (Both Block Wavelength Guide Out)	
Fiber Type at 3 rd or 4 th Port (Y/X Type)	-	Same Fiber of other ports or 50/125um MM Fiber		
ASE Direction	Forward Type	-	Bandpass Filter is before isolator	
	Backward Type	-	Bandpass Filter is after isolator	
	Twin Type	-	Bandpass Filter is at both sides of isolator	
Optical Return Loss	dB	≥45		
PDL	dB	≤0.2		
Fiber Type	-	SMF-28 Fiber or SM1950 Fiber (V) 10/130um DC Fiber (O) or 25/250um DC Fiber (R)		
Max. Optical Power (CW)	W	1, 2		3, 5, 10
Operating Temperature	°C	0~50		
Storage Temperature	°C	-40~85		
Package	Stainless Steel Tube (SST)	mm	(Ø)5.5x35	
Dimension	Metal Box	mm	(L)120x(W)12x(H)10	
				See Drawing

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
 2. To add connectors, IL is 0.3dB higher, RL is 5dB lower.
 3. Suggest to use Y or X type if blocked optical power is >1W.
 4. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 5. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION

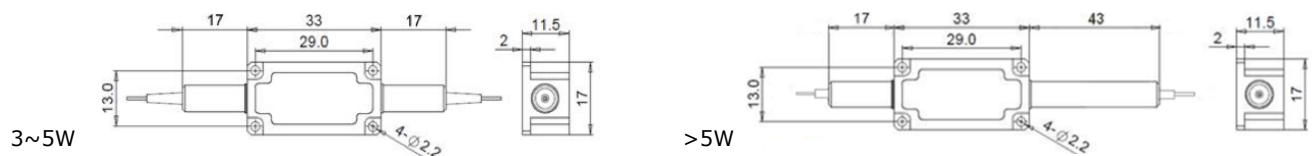

ORDERING INFORMATION (PN)

Stage	Bandwidth	ASE Type	3rd Port Fiber	4th Port Fiber	Optical Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
S= Single Stage	60~6nm	F= Forward	Y=Same Fiber	Y=Same Fiber	1= 1W	M= Metal Box	V= SM1950 Fiber	B= Bare fiber	05=0.5m	N=Without Connector
D= Dual Stage		B=Backward	5=50/125um Fiber	5=50/125um Fiber	3= 3W	Blank for SST	E=10/130 DC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
H= H Stage		T=Twin	Blank for D Type	Blank for D&Y Type	5= 5W	or >2W	R=25/250 DC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
					10=10W		Blank for SMF-28 Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector